HS SERIES

High-speed washer
Soft-mount structure

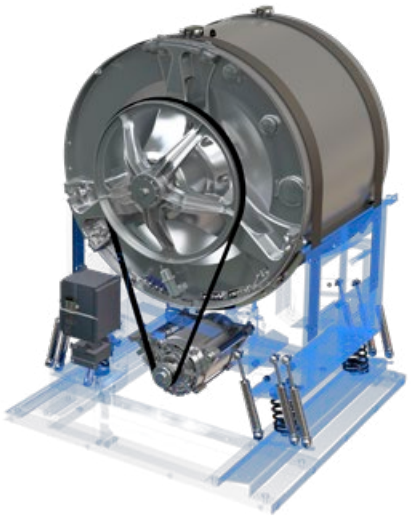

Robustness, durability and profitability
Robust, profitable design . Made using the finest materials to ensure long life and fast payback.

Intensive washing and care for linen
The Care Touch system and advanced controls ensure meticulous care of linen. High quality finishes for linen, prolonging items' life by caring for fibres.

A control to meet every need
Choose from a wide range of fully-equipped controls to meet every need

- **Inteli** Powerful, flexible and easy to use, to ensure the best results from washing and meet every customer's needs. Up to 99 programmes with unlimited phases and 12 dosing signals.
- **Logi** up to 8 programmes / 9 phases, with 4 selectable water levels and 4 dosing signals.
- **Coin** for vended laundries, 4 fully configurable programmes.
- **Profit Plus** for vended laundries, 4 fully configurable programmes plus 3 extra options to boost revenue.

High spin capacity. Save on drying.
HS washing machines feature a powerful spin G force which is kept up throughout the spin phase.
The residual humidity level in linen is minimised, cutting heat energy costs in washing and reducing drying times by up to 50%.

Wet Cleaning Ready
The versatility of the controls and the large number of features enable HS models to adapt washing cycle settings to Wet Cleaning processes.

Aqua Fall
Water consumption is minimised thanks to the design of the perforated blades in the drum, creating a cascade effect. More washing action with less water, making it possible to shorten cycle time and save water.

Plug and Play
No anchoring needed thanks to soft-mount technology.

Aqua Mixer
High-precision water temperature control system (+/- 1ºC) throughout the cycle. In washing machines with internal heating the temperature can be maintained. Excellent for the most demanding processes, such as disinfection.

Smart Load (Inteli Control)
Automatic weight detection for automatic adjustment of water, energy and chemicals.

sapphire Ready

- Online laundry management platform to monitor and control Girbau machines remotely.
- Allows you to cut laundry costs and boost your business.
- To find out more visit: sapphire.girbau.com

HS6024

GIRBAU

v00-1020

Capacidad ropa seca 1/9	kg (lb)	26,6 (58,5)	
Capacidad ropa seca 1/10	kg (lb)	23,9 (52,7)	
Volumen tambor	dm3 (cu ft)	239 (8,4)	
Diámetro tambor	mm (in)	765 (30,1)	
Longitud tambor	mm (in)	520 (20,5)	
Carga estática transmitida	kg (lb)	693 (1.528)	
Carga dinámica transmitida	kg (lb)	132 (291)	
Frecuencia carga dinámica	Hz	16,1	
Energía cinética	N*m	74.789	
Nivel sonoro	dbA	<70	
Dimensiones maquina			
(L) Anchura	mm (in)	975 (38,4)	
(P) Profundidad	mm (in)	1.225 (48,2)	
(H) Altura	mm (in)	1.477 (58,1)	
Peso	kg (lb)	584 (1.289)	
Diámetro boca de carga	mm (in)	424 (16,7)	
(h) Altura base puerta al suelo	mm (in)	581 (22,9)	
Dimensiones maquina con embalaje			
Anchura	mm (in)	1.002 (39,4)	
Profundidad	mm (in)	1.260 (49,6)	
Altura	mm (in)	1.630 (64,2)	
Peso	kg (lb)	607 (1.338)	
Potencia motor		1 Ph	3 Ph
Lavado	kVA	1	0,75
Centrifugado	kVA	2,1	1,88
Velocidades			
Lavado	r.p.m.	42	
Centrifugado	r.p.m.	966	
Factor G		400	
CONEXIONES			
(A) Agua caliente			
Conexión ø	in	3/4	
Presión recomendada	bar (psi)	0,5-6 (7-87)	
Caudal	l/min(USgal/min)	60 (16)	
Temperatura máxima	°C (°F)	80	
(D) Desague			
Desagüe gravedad ø	in	3,1	
Caudal	l/min(USgal/min)	130 (34)	
(V) Vapor			
Conexión ø	in	1/2	
Presión recomendada	bar (psi)	6 (90)	
Caudal ø	kg/h (lb/h)	80 (176)	
(d) Dosificación externa			
Conexión ø	in	3/8	
(E) Electricidad			
Calefacción eléctrica			

Voltaje nominal	Hz	Potencia calefacción kW	Potencia total k W	Interruptor A
200-240V	50/60Hz 3ph	12/19,5	12,9 / 20,4	40 / 63
380-415V	50/60Hz 3ph	12/19,6	13 / 20,8	25 / 40
Vapor o sin calefacción				
200-240V	50/60Hz 1ph	-	1,88	16
200-240V	50/60Hz 3ph	-	1,88	10
380-480V	50/60Hz 3ph	-	1,88	6
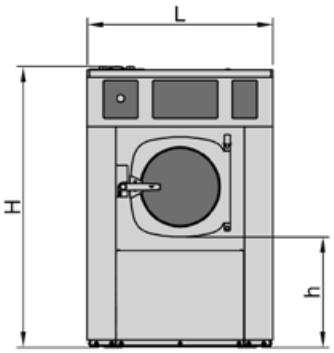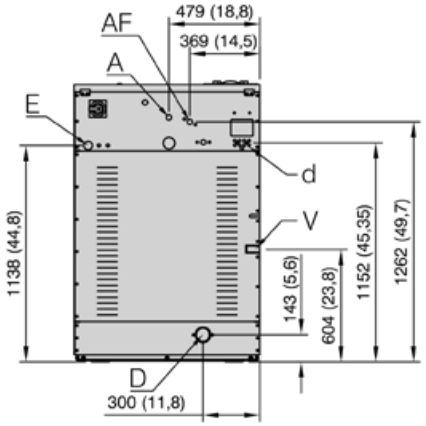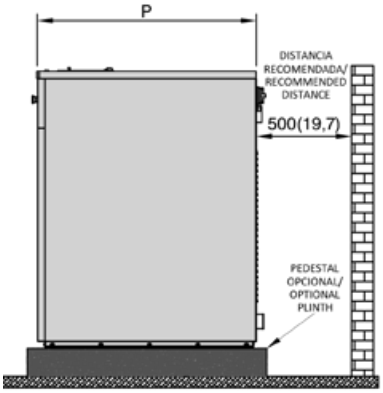
*Especificaciones sujetas a cambio sin previo aviso ni obligación